

# INSTALLATION INSTRUCTION FOR FIXTURE #4494-298

**WARNING! SHUT OFF THE POWER AT FUSE OR CIRCUIT BREAKER.**

## ASSEMBLY THE FIXTURE

1. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
2. Thread the tube (O) onto the nipple (U) tightly.
3. Assemble the fabric shade (P) onto the fixture arm using screw with nut (Q) well.
4. Put the glass shade (S) over the socket (T) and secure with socket ring(R).
5. Assemble the tubes (K) & couling(L) together using the nipple (M) well.
6. Assemble the decorative arm (N) onto the tube (O) using the coupling (L).
7. Install the canopy (F), steel plate (I), lock washer (H) onto the nipple (M) on the top end of tube (K) and fix them in place with hex nut (G) tightly.
8. Install the bulb in accordance with fixture's specifications. **DO NOT EXCEED THE MAXMUM WATTAGE RATING!**


## MOUNTING THE FIXTURE

9. Shut off the power supply at the fuse box or circuit breaker box. Remove the old fixture from ceiling. Including the old cross bar.
10. Thread the nipple (D) into the mounting bar (A) properly, then slide the shake proof washer (B) onto the nipple (D), and secure it with Lock nut(C).
11. Take this mounting bar assembly and mount to ceiling outlet box using outlet box screw (E) tightly. The side of mounting Bar (A) marked with "GND" must face out.

## CONNECTING THE WIRE (See fig.2)

12. Take the black wire from the ceiling outlet box and the fixture black wire and twist bare ends together. Twist wire connector onto end of wire until snug.
13. Repeat same process with white junction box wire and the fixture white wire . NOTE :Twist wire together in the same direction, then twist the wire connector onto wire.
14. If your outlet box has a grounding wire (Green or bare copper).Attach this wire and the bare copper wire from the fixture together as step 1. If outlet box has no ground wire. Attach the bare copper fixture wire to the green ground screw on the cross bar.
15. Tuck these wires connectors neatly into the ceiling outlet box and raise up the ceiling canopy(F) and let the nipple (D) protrude through the center hole of the canopy (F), and secure with finial(H).
16. Your installation is now complete. Return power to the junction box and test the fixture.

**Fig.1**

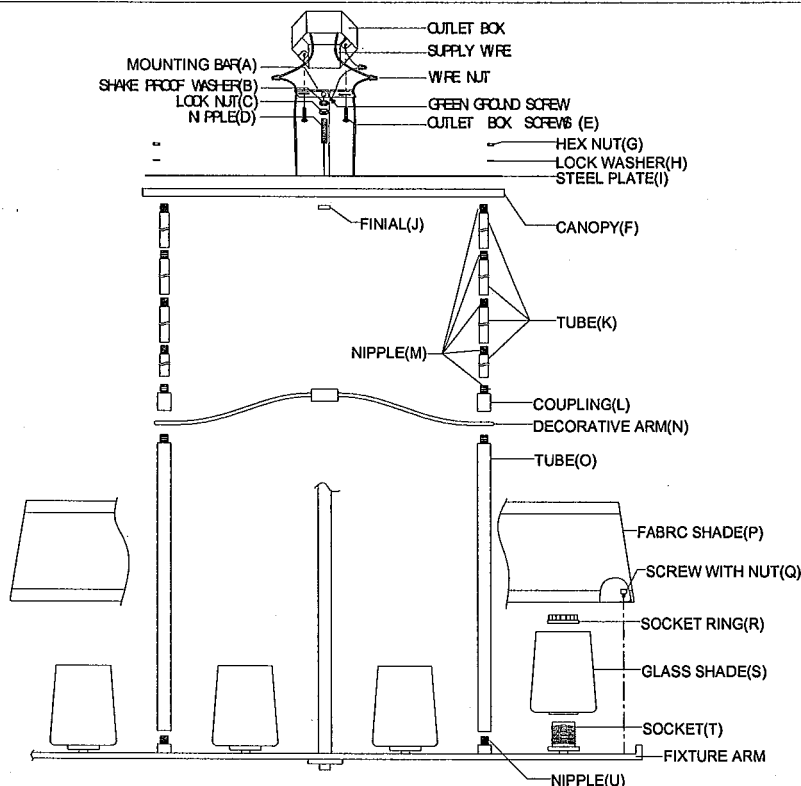


FIXTURE  
WIRES  
BLACK OR  
SMOOTH



FIXTURE  
WIRES  
WHITE OR  
RIBBED



FIXTURE  
WIRES  
GREEN OR  
BARE  
COPPER  
(GROUND)



american  
lighting  
association

**Fig.2**